
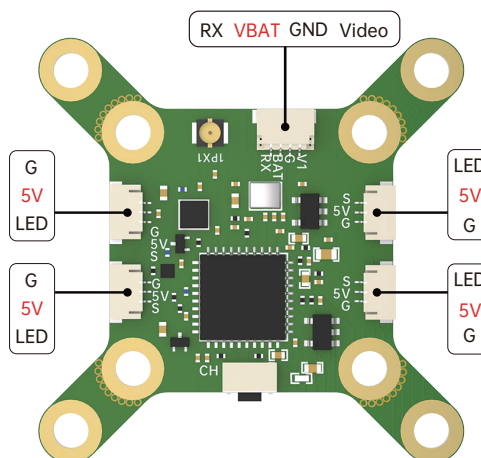


BLITZ RACE VTX Instructions

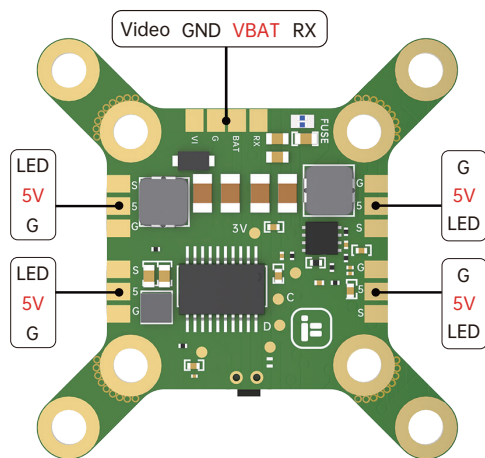

RX: IRC Tramp signal input
VBAT: Positive, input voltage 7-26V
GND: Negative
VIDEO: Video signal input
5V: LED strip output voltage 5V
LED: LED strip signal output

Attention:

- (1) Please read the instructions for proper wiring before use.
- (2) It is recommended that before switching on the power, make sure that the antenna has been installed, it can extend the life of the module.
- (3) It is recommended to ensure the correct voltage range and the correct positive and negative polarity before switching on the power to avoid burning the components.
- (4) Please keep enough space when you install the VTX to ensure air convection around the module for heat dissipation. Otherwise, the module will enable overheat protection and the power transmission will be reduced or even switched off.

LED indicator and channel button:

Short press to change BAND channel without IRC Tramp control channel cycled in RACE BAND 1-8CH.

Press and hold for 1s to change the LED strip color cycled in 8 colors : red, purple, yellow, orange, cyan, blue, green, white

Press and hold for 3s to enter or exit PIT mode.

Frequency Table

BAND	CHANNEL (MHz)							
RACE	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
	5658	5695	5732	5769	5806	5843	5880	5917